

Latest Star Products

SZSW2520
Portable Glare Inspection
Workinglight



Brighter and Longer



Power Display



Magnetic Attraction



Anti-fall
The shell is super strong
Anti-fall engineering materials

Impact Resistance Level: IK09

SZSW2104A
Strong Flashlight



Centralized Charging



Power Display



Non-slip Material



Ergonomic Design

SEVA Group Business Area



Industrial Lighting



Educational Lighting




Landscape lighting



Video integration

The Company's National Sales and Service Network

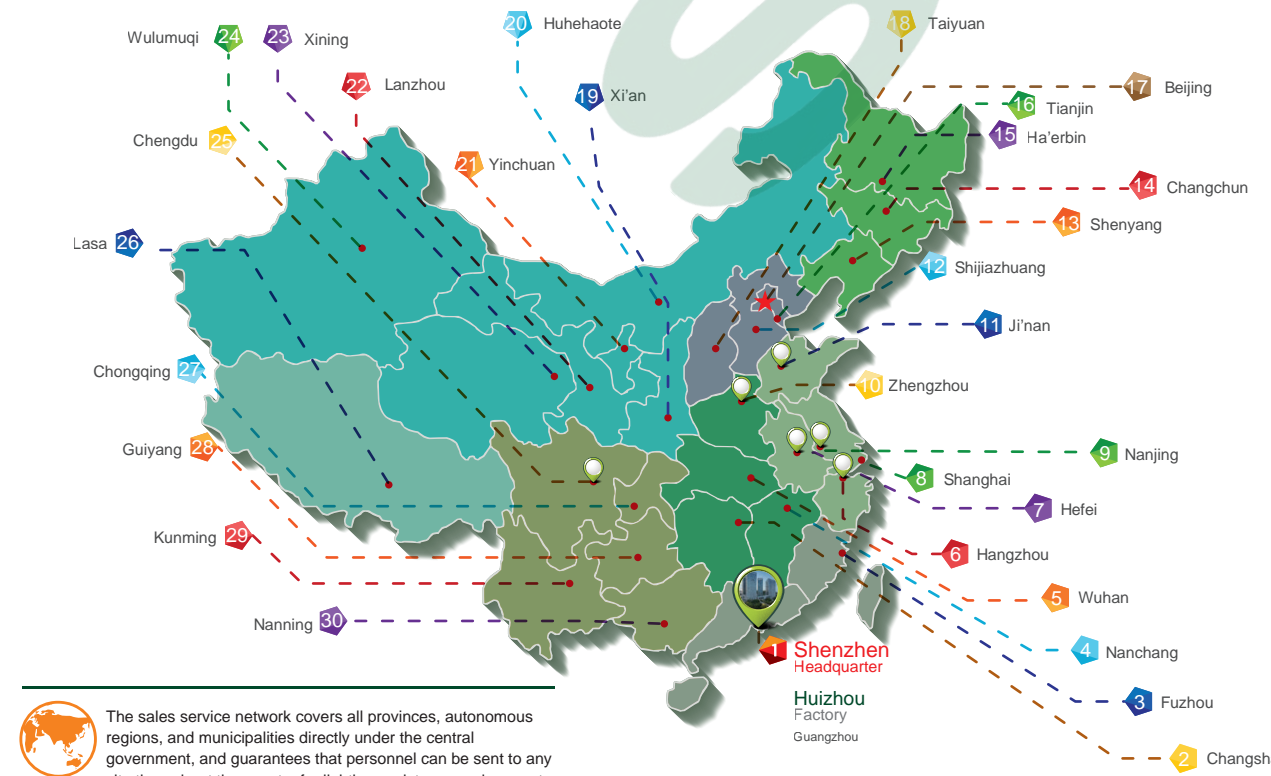

The sales service network covers all provinces, autonomous regions, and municipalities directly under the central government, and guarantees that personnel can be sent to any site throughout the country for lighting assistance and support within 24 hours.

Tel: +86-752-3503602 Website: www.szseva.com Email: alice.hzx@szseva.com
Factory add: SEVA industry park, dushi village, pingtan town, Huiyang district, Huizhou city Guangdong province, China



SEVA®

Safe Environmental Valuable Advance



Linkedin

Lighting Product Catalog of Railway Industry

V.2020



SEVA® About SEVA Group

SEVA Lighting was established in 2008 and its headquarters is located in the Qianhai Center in Shenzhen. It is a group company with industrial lighting research and development applications, large-screen display systems, and intelligent control system integration as its core. , LED large-screen display, international lighting, lighting lighting six areas, dedicated to power, railway, metallurgy, coal, petroleum, chemical, public security, military, port, aviation, education, medical and other industries to provide professional lighting, lighting , Audio and video systems, intelligent control system design and solutions. The products have passed CCC, CQC, CRCC, coal safety, explosion-proof, fire protection, energy saving, UL, ATEX, IECEx, CB, CE, FCC, ROHS and other authoritative certifications. "SEVA" has become a famous brand in China and a famous trademark in Guangdong Province. It is an AAA grade quality-honoring and credit-respecting enterprise, and has been awarded as a trusted product enterprise by China 3.15 Consumers Association.

R & D strength SEVA Lighting has three R & D centers for industrial lighting, large-screen display, and intelligent control, and has established the "Guangdong Engineering Technology Center". It has a professional laboratory certified by the China National Accreditation Service for Conformity Assessment (CNAS), which is innovative in the industry Various new technologies and access to nearly a thousand items such as design, utility model, invention patent, software copyright, etc., to provide customers with a full range of technical services.

Precision Manufacturing SEVA Lighting Smart Optoelectronics Industrial Park is located in Huizhou. The first phase of the industrial park covers an area of 37,000m². It has obtained national industrial product production license qualifications. It has 10 years of industrial product manufacturing experience and many advanced production equipment. Its design annual manufacturing capacity can meet tens of billions of markets. demand. The core processes of product die-casting, machining, shot blasting, spraying, surface mounting, automatic welding, aging, assembly, and inspection are completed independently, and have a complete industrial chain.



Photometric Distribution Test System

Photoelectric Color Test System

Environmental Reliability Test System

Product Life Tracking Test System




Optical Strobe Test System



LED Lamp Life Test System



Electromagnetic Conduction Radiation Test system



Safety Reliability Test System



SW2102 >Explosion-proof Glare Flashlight

- ◆ Light Source: LED (3W)
- ◆ Strong Light≥24h Working Light≥28h
- ◆ Dimensions: Φ40-Φ26, L=142mm
- ◆ Weight: 205g
- ◆ Protection Grade: IP66

SW2151 > Portable Searchlight

- ◆ Light Source: LED (5W)
- ◆ Strong Light≥15h Working Light≥25h
- ◆ Dimensions: Φ66x196mm
- ◆ Weight: 320g
- ◆ Protection Grade: IP66

SW2180 >Explosion-proof LED Rod Tube Light

- ◆ Light Source: LED (4W)
- ◆ Floodlight ≥5h Working Light ≥10h
- ◆ Torch Light ≥5h Working Light ≥10h
- ◆ Warning Light ≥20h Frequency: 1.5Hz
- ◆ Dimensions: Φ32x230mm
- ◆ Weight: 205g Protection Grade: IP54

SZSW2220 >Explosion-proof Mini Headlight

- ◆ Light Source: LED (1W)
- ◆ Strong Light ≥24h Working Light ≥28h
- ◆ Working Light≥16h
- ◆ Dimensions: 97x50x63mm
- ◆ Weight: 95g Protection Grade: IP66

SZSW2410 > LED Working Light

- ◆ Light Source: LED (15W)
- ◆ Strong Light ≥10h Working Light ≥33h
- ◆ Spotlight≥33h
- ◆ Dimensions: 198x142x267mm
- ◆ Weight: 2.6kg Protection Grade: IP65

SW2600/2601 > Explosion-proof working

- ◆ Light Source: LED (30W)
- ◆ Strong Light ≥10h / 8h Working Light ≥20h / 14h
- ◆ Lighting Time ≥12h
- ◆ Dimensions: 262x212x850mm
- ◆ Weight: 6.0kg Protection Grade: IP65

SZSW2720 > Explosion-proof Warning Light

- ◆ Light Source: LED (red blue / yellow Blue / Yellow Green / Full Yellow)
- ◆ Working Time ≥8h Charging Time ≤1h
- ◆ Flashing Frequency: 8Hz-9Hz, Two Colors Alternate Every Second
- ◆ Dimensions: 30x30x15mm
- ◆ Weight: 12g Protection Grade: IP66

SZSW2860 > 4G Smart Camera Flashlight

- ◆ Light source: LED (1W) + red and green signal light
- ◆ Working time: Lighting (without video recording) ≥24h Videography (no lighting) ≥12h, lighting + videography ≥8h
- ◆ Camera pixels: 16 million Protection level: IP65
- ◆ Memory capacity: Built-in 16G + expansion 64G
- ◆ Weight: 473g Android system / 4G full Netcom / WIFI / Bluetooth
- ◆ Navigation and positioning: GPS / Beidou / GLONASS

SZSW2103 >Explosion-proof Mini Flashlight

- ◆ Light Source: LED (3W)
- ◆ Strong Light≥24h Working Light≥28h
- ◆ Dimensions: Φ23.8x121mm
- ◆ Weight: 98g
- ◆ Protection Grade: IP67

SZSW2160 >Double-sided Warning Light

- ◆ Light Source: LED (Red Light)
- ◆ Flashing ≥34h Flash Frequency: 1.5±0.5Hz
- ◆ Dimensions: Φ100x56mm
- ◆ L = 263-332mm
- ◆ Φ100x56mm, L = 158mm
- ◆ Weight: 565g / 445g

SZSW2186 > Multifunctional Working Light

- ◆ Light Source: LED (3W / 5W)
- ◆ Floodlight ≥9h / 13h
- ◆ Torch Light≥12h / 19h
- ◆ Warning Light: red light, blue light, red and blue flash alternately
- ◆ Weight: 195g / 270g Protection Grade: IP66
- ◆ Dimensions: 41.2x43.5x195 / 260mm

SZSW2221 >Explosion-proof Mini Headlight

- ◆ Light Source: LED (3W)
- ◆ Strong Light ≥24h Working Light ≥28h
- ◆ Light Distribution: Spotlight + Floodlight Switching
- ◆ Dimensions: 97x50x63mm
- ◆ Weight: 115g Protection Grade: IP66

SW2510 > Multifunctional Inspection Ligh

- ◆ Light Source: LED (9W)
- ◆ Strong Light ≥24h Working Light ≥12h
- ◆ Ultra Long ≥50h
- ◆ Dimensions: 215x88x140mm
- ◆ Weight: 830g Protection Grade: IP66

SZSW2631 > Portable Working Light

- ◆ Light Source: LED (35W)
- ◆ Spotlight≥16h Floodlight≥12h
- ◆ Spotlight + Floodlight≥28h
- ◆ Lifting Height: 1.5m
- ◆ Dimensions: 500x270x170mm
- ◆ Weight: 8.0kg Protection Grade: IP65

SZSW2841 > Work Recorder

- ◆ Working Time ≥13h
- ◆ Camera Pixels: 32 million
- ◆ Night Shooting: Infrared shooting within 10 meters
- ◆ Memory Capacity: 64G
- ◆ Lens Angle: Wide Angle 120 °
- ◆ Dimensions: 82x56x31mm
- ◆ Weight: 142g
- ◆ Protection Grade: IP65

SZSW2861 > Camera Flashlight

- ◆ Light Source: LED (1W)
- ◆ Working Time: Lighting (without video recording) ≥12h, Videography (without lighting) ≥12h, Lighting + Videography ≥28h
- ◆ Camera Pixels: 30 million
- ◆ Protection Grade: IP65
- ◆ Memory Capacity: 64G
- ◆ Weight: 350g

SZSW2104A > High-powered Flashlight

- ◆ Light Source: LED (5W)
- ◆ Strong Light≥24h Working Light≥20h
- ◆ Dimensions: Φ38-26, L=159.5mm
- ◆ Weight: 195g
- ◆ Protection Grade: IP67
- ◆ Optional SZSW1005 Centralized Charging Stand

SW2170 >Explosion-proof Multifunctional Lamp

- ◆ Light Source: LED (5W)
- ◆ Floodlight≥28h Flashlight≥28h
- ◆ Warning Light ≥40h
- ◆ Dimensions: Φ98x150mm
- ◆ Weight: 345g Protection Grade: IP54

SZSW2190 >Explosion-proof Searchlight

- ◆ Light Source: LED (5W)
- ◆ Super Bright Light ≥4h Strong Light ≥28h Working Light ≥20h
- ◆ Irradiation Distance ≥1000m
- ◆ Dimensions: Φ40.5x174mm
- ◆ Φ40x345 (plus signal set)
- ◆ Weight: 332g Protection Grade: IP66

SW2300 >Explosion-proof Portable Searchlight

- ◆ Light Source: LED (9W)
- ◆ Battery Capacity: 4.4Ah / 2.2Ah
- ◆ Strong Light ≥28h / 6h Working Light ≥16h / 10h
- ◆ Weight: 870g / 760g
- ◆ Dimensions: Φ70x160mm
- ◆ Protection Grade: IP68

SZSW2520/2521 > Patrol Light

- ◆ Light Source: LED (3W / 5W)
- ◆ Strong Light ≥12h Working Light ≥22h
- ◆ Dimensions: 195x72x115mm
- ◆ Weight: 610g / 650g
- ◆ Protection Grade: IP66

SW2700B > Multifunctional Signal Light

- ◆ Light Source: LED
- ◆ Signal Light: red green white, red yellow white
- ◆ Lighting Time ≥12h
- ◆ Signal Time ≥14h
- ◆ Dimensions: Φ61-Φ35x195mm
- ◆ Weight: 280g Protection Grade: IP66

SZSW2842 > 4G Working Recorder

- ◆ Working Time: Separate Recording 720p≥16 hours
- ◆ 4G Camera Pixels: 36 million Memory capacity: 64G
- ◆ Resolution: up to 1296P / 30f
- ◆ Lens Angle: wide angle 120 ° Dimensions: 100x65x31mm
- ◆ Weight: 188g Protection Grade: IP65
- ◆ Satellite Positioning: Support GPS / Beidou real-time positioning
- ◆ 4G Network: Support Mobile / Unicom / Telecom wireless communication network

SZSW2880 > Lighting Control Machine

- ◆ Light Source: LED
- ◆ Camera Pixels ≥ 2 million
- ◆ Maximum Resolution: 1920x1080
- ◆ Protection Grade: IP65
- ◆ Weight: 8.0kg (excluding battery and accessories)
- ◆ Support Night Vision Mode (Infrared Fill Light)

SW2910 > Automatic lifting Working Light

- ◆ Power: A Type 4x500W (Halogen Lamp) C Type 4x80W (LED light) / D Type 4x150W (LED Light)
- ◆ Continuous Working Time: 13h (A Type) / 22h (C Type) / 22h (D Type)
- ◆ Lifting Height: 4.5m (Standard) / 5m, 6m (Optional)
- ◆ Collapsed Dimensions: 1010x510x800 (2KW)
- ◆ Weight: 60kg (2KW) Protection Grade: IP65
- Remarks: Only 6m cylinder with extension fixing bracket

SZSW8120/8121 >Explosion-proof LED Floodlight

- ◆ Ex-mark: II 2G Ex Db op is IIB + H2 T5 Gb / II 2D Ex op is tb IIC T100 ° Db
- ◆ Light Source: LED (150W / 180W / 200W)
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Dimensions: 396x285x85.8mm
- ◆ Weight: 8.3kg
- ◆ Protection Grade: IP66

SZSW8162 > Explosion-proof LED Workin

- ◆ Ex-mark: Ex nR IIC T6 Gc Ex ID A21 IP67 T80 ° C
- ◆ Light Source: LED (12W / 18W / 24W)
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Dimensions: Φ180x100mm
- ◆ Weight: 1.4kg Protection Grade: IP67

SZSW7130 > LED Working Light

- ◆ Light Source: LED (100W / 80W)
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Dimensions: Φ256x88mm
- ◆ Weight: 3.5kg Protection Grade: IP65
- ◆ Light Emitting Angle: 10 °

SZSW7163 > LED Emergency Working Light

- ◆ Light Source: LED (12W / 18W)
- ◆ Emergency Power: 5W Emergency time ≥90min
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Dimensions: Φ180x100mm Weight: 1.6kg
- ◆ Protection Grade: IP67
- ◆ Emergency Function: Continuous
- Can switch to control whether to enable emergency mode

SW7240/7241 >LED Emergency Working Light

- ◆ Light source: LED (12W)
- ◆ Emergency time ≥ 4h
- ◆ Rated voltage: AC220, 50Hz
- ◆ Dimensions: 230x208x70mm
- ◆ Weight: 1.7kg
- ◆ Protection Grade: IP66
- ◆ Emergency Function: non-continuous / continuous

SZSW7180/7181 > LED Floodlight/Spotlight

- ◆ Light Source: LED (150W / 180W / 200W)
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Dimensions: 390x280x83mm
- ◆ Weight: 6.1kg
- ◆ Protection Grade: IP66
- ◆ Floodlight Angle: 20 °

SW2930 > Portable Lifting Lamp

- ◆ Light Source: LED (2x80W)
- ◆ Light Effect: 120lm / W
- ◆ Maximum Lifting Height: 3m
- ◆ Weight: 7.8kg (Lamp Base) 6.7kg (Lamp Pole)
- ◆ Protection Grade: IP65

SZSW8135 > Explosion-proof LED Platform Light

- ◆ Explosion-proof mark: Ex d IIC T6 Gb Ex ID A21 IP66 T80 ° C
- ◆ Light Source: LED (30W / 40W / 50W)
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Weight: 3kg (F Type) / 3.4kg (Q Type)
- ◆ Protection Grade: IP66
- ◆ Dimensions: Φ205x122mm (F Type) Φ205x191mm (Q Type)

SZSW8163 >Explosion-proof LED Working light

- ◆ Ex-mark: Ex nR IIC T6 Gc Ex ID A21 IP67 T80 ° C
- ◆ Light Source: LED (12W / 18W)
- ◆ Emergency Power: 5W Emergency time: ≥90min
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Weight: 1.6kg Dimensions: Φ180x100mm
- ◆ Protection Grade: IP67
- ◆ Emergency Function: Continuous
- Can switch to control whether to enable emergency mode

SZSW7140 > LED Working Light

- ◆ Light Source: LED (60W / 50W / 40W / 30W)
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Dimensions: Φ210x88mm
- ◆ Weight: 2.6kg Protection Grade: IP65
- ◆ Light Emitting Angle: 10 °

SZSW7211 > LED Emergency Working Light

- ◆ Light Source: LED (12W / 20W)
- ◆ Emergency Power: 12W
- ◆ Emergency Time ≥20min
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Applicable Voltage: AC100V-277V, DC21V-24V
- ◆ Dimensions: 246x343x62mm
- ◆ Weight: 900g Protection Grade: IP66
- 12W is not continuous, 30W / 50W is continuous

SZSW7340 > LED Low Ceiling Light

- ◆ Light Source: LED (18W / 24W)
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Dimensions: 340x145x36mm
- ◆ Weight: 1.4kg
- ◆ Protection Grade: IP65

SZSW7250/7251 > LED Floodlight/Spotlight

- ◆ Light Source: LED (60W / 80W)
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Dimensions: 279x336x60mm
- ◆ Weight: 5.8kg
- ◆ Protection Grade: IP65
- ◆ Luminous Angle of floodlight: 20 ° / 40 °

SZSW2951 > Portable Lighting

- ◆ Light Source: LED (50W)
- ◆ Strong Light ≥4h Working Light ≥8h
- ◆ Maximum Lifting Height: 3m (Tripod Type)
- ◆ Hand Dimensions: 300x440x470mm
- ◆ Weight: 5.2kg
- ◆ Tripod Dimensions: 150x270x1200mm
- ◆ Weight: 6.1kg Protection Grade: IP66

SZSW8155 >Explosion-proof LED Platform Light

- ◆ Ex-mark: Ex d IIC T6 Gb Ex ID A21 IP66 T80 ° C
- ◆ Light Source: LED (80W/100W)
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Weight: 5.3kg (F Type) / 6.5kg (Q Type)
- ◆ Protection Grade: IP66
- ◆ Dimensions: Φ260x153mm (F type) Φ260x262mm (Q type)

SZSW8170/8171 > LED Access Light

- ◆ Ex-mark: Ex nR IIC T6 Gc Ex ID A22 IP66 T80 ° C
- ◆ Light Source: LED (12W / 18W / 30W)
- ◆ Rated Voltage: AC220V, 50Hz, 24V ~ 36V
- ◆ Dimensions: 216x140x50mm
- ◆ Weight: 1.2kg Protection Grade: IP66
- ◆ Induction Method: Infrared Sensor
- ◆ Induction Brightness: 30% when there is no one, 100% when there is one

SZSW7162 > LED Working Light

- ◆ Light Source: LED (12W / 18W / 24W)
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Dimensions: Φ180x100mm
- ◆ Weight: 1.4kg
- ◆ Protection Grade: IP67

SZSW7215 > LED Working Light

- ◆ Light Source: LED (60W / 80W / 100W)
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Applicable Voltage: AC100V-240V, DC140V-365V
- ◆ Light Effect: 100 lm / W (flood) / 110 lm / W (projection)
- ◆ Dimensions: 300x240x125mm
- ◆ Weight: 4.7kg Protection Grade: IP66

SZSW7341 > LED Low Ceiling Light

- ◆ Light Source: LED (18W / 24W)
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Dimensions: 340x145x36mm
- ◆ Weight: 1.4kg
- ◆ Protection Grade: IP65

SZSW7260/7261 > LED Floodlight/Spotlight

- ◆ Light Source: LED (100W / 120W)
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Dimensions: 348x336x60mm
- ◆ Weight: 6.5kg Protection Grade: IP65
- ◆ Luminous Angle of Floodlight: 20 ° / 40 °

SZSW7270/7271 > LED Floodlight/Spotlig

- ◆ Light Source: LED (150W / 180W)
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Weight: 7.2kg Protection Grade: IP65
- ◆ Dimensions: 418x336x60mm
- ◆ Luminous Angle of Floodlight: 20 ° / 40 °

SZSW7320 > LED Ceiling Light

- ◆ Light Source: LED (40W / 60W / 80W / 100W / 120W)
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Dimensions: 254x196x73.5mm (40W) 254x230x73.5mm (60W / 80W) 330x330x73.5mm (100W / 120W)
- ◆ Weight: 2.7kg / 3.9kg / 4.2kg / 5.9kg / 6.3kg
- ◆ Protection Grade: IP65
- ◆ Light Distribution Angle: 90 ° / 135x60 °

SZSW7820 > LED Downlight

- ◆ Light Source: LED (100W / 80W)
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Dimensions: Φ225x260mm (Surface Mounted) Φ240x260mm (Embedded)
- ◆ Weight: 5.2kg Protection Grade: IP65
- ◆ Light Distribution Angle: 40°

SZSW7700 > LED Street Light

- ◆ Light Source: LED (60W / 80W) Single Module LED (100W / 120W / 150W) Dual Module LED (180W / 200W / 240W) Three Modules
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Dimensions: (470/610/750) x226x83mm
- ◆ Weight: 5.1kg (Single) / 7.0kg (Double) / 8.9kg (Three)
- ◆ Protection Grade: IP65
- ◆ Applicable Lamp Post: Φ60mm or less

SW-ZFZD-E3W-7243A > Fire Emergency Sign

- ◆ Power: 3W
- ◆ Emergency Time ≥90min
- ◆ Working Voltage: AC220V, 50Hz
- ◆ Style: Non-continuous
- ◆ Dimensions: 260x287x36mm
- ◆ Protection Grade: IP30 Weight: 1.0kg

SZSW1155 > LED Panel Light (Side Light)

- ◆ Power: 36W / 48W
- ◆ Working Voltage: AC220V, 50Hz
- ◆ Color Temperature: 5700K
- ◆ Ra ≥80
- ◆ Dimensions: 295x1205x11mm
- ◆ Weight: 4.5kg

SZSW1270/PS > LED Ceiling Light

- ◆ Power: 12W / 18W / 24W / 32W
- ◆ Working Voltage: AC220V, 50Hz
- ◆ Color Temperature: 5700K
- ◆ Ra ≥80
- ◆ Dimensions: 329x58mm / 387x58mm 420x60mm / 509x60mm
- ◆ Induction Distance: 3.5m between person and lamp
- ◆ Induction Delay: 30s after the person leaves
- ◆ Brightness Change: 30% / 100%

SZSW2650 > Mobile Power Station

- ◆ Battery Energy: 1002Wh / 626Wh / 311Wh
- ◆ Lighting Power: 1W (1000/600 type)
- ◆ Output Voltage: 220V ~ 50Hz 4.54A 220V ~ 50Hz 2.27A / 220V ~ 50Hz 0.91A
- ◆ Output Power: continuous 1000W, peak 2000W
- ◆ Continuous 600W, peak 1000W
- ◆ Continuous 200W, peak 400W
- ◆ Dimensions: 332x232x282mm 300x195x241mm / 230x132x195mm
- ◆ Weight: 10kg / 6.3kg / 3.4kg
- ◆ SZSW2650-1000/600/300

SZSW7280/7281 > LED Floodlight/Spotlig

- ◆ Light Source: LED (200W / 240W)
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Dimensions: 687x336x62mm
- ◆ Protection Grade: IP65 Weight: 9.9kg
- ◆ Luminous Angle of Floodlight: 20 ° / 40 °

SZSW7450 > LED high Ceiling Light

- ◆ Light Source: LED (100W / 150W / 200W / 300W)
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Dimensions: Φ185x157mm / Φ240x147mm Φ280x155mm / Φ330x255mm
- ◆ Weight: 3.1kg / 3.6kg / 5.6kg / 7.8kg
- ◆ Protection Grade: IP66

SZSW7830 > LED Downlight

- ◆ Light Source: LED (60W / 40W)
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Dimensions: Φ175x210mm (surface mounted) Φ205x210mm (embedded)
- ◆ Weight: 3.5kg Protection Grade: IP65
- ◆ Light Distribution Angle: 60 °

SZSW7720 > LED Street Light

- ◆ Light Source: LED (30W / 42W / 60W / 80W / 100W / 120W / 150W)
- ◆ Rated Voltage: AC220V, 50Hz
- ◆ Dimensions: (273/304/384/465/545) x248x83mm
- ◆ Weight: 2.4kg / 3.0kg / 3.8kg / 4.5kg / 5.2kg
- ◆ Protection Grade: IP66
- ◆ Applicable Lamp Post: Φ60mm or less

SW-BLZD-1LROE I 3W-7244 > Fire Emergency Sign

- ◆ Power: 3W
- ◆ Emergency Time ≥90min
- ◆ Working Voltage: AC220V, 50Hz
- ◆ Style: Continuous
- ◆ Dimensions: 349x166x35mm
- ◆ Weight: 1.0kg Protection Grade: IP54

SZSW1160 > LED Panel Light (Down Type)

- ◆ Power: 36W / 48W
- ◆ Working Voltage: AC220V, 50Hz
- ◆ Color Temperature: 5700K
- ◆ Ra ≥80
- ◆ Dimensions: 598x598x55mm
- ◆ Weight: 2.4kg

SZSW1256 > LED Recessed Downlight (the Casting)

- ◆ Power: 9W / 12W / 15W / 20W / 30W
- ◆ Working Voltage: AC220V, 50Hz
- ◆ Color Temperature: 5700K Ra ≥80
- ◆ Dimensions: 2.5 / 3 / 3.5 / 4 / 5 / 6 inch
- ◆ Hole Size: Φ95mm / Φ110mm Φ125mm / Φ150mm / Φ200mm</