

SZSW2631 Portable Work Light



■ Features

- Applicable to provide mobile lighting for railways, power grids, public security fire protection, accident repairs and other work sites.

■ Technical Parameters

No	Table Of Basic Product Parameters		
1	Light Source	LED (OSRAM)	
2	Lamp Power	35W	
3	Rated Voltage	AC85~260V,50-60Hz	
4	Luminous Flux	4200lm	
5	Average Lamp Life	≥100000h	
6	Maximum Lifting Height	1.5m	
7	Protection Rating	IP65 (Lamp Base), IP54 (Light Box)	
8	Light Mode	Strong Light, Spotlight, Floodlight, Red and Yellow Warning Lights	
9	Continuous Working Time	8h (Strong Light)	16h(Spot Light) 12h(Flood Light)
10	Ambient Temperature	-20℃ ~ +40℃	
11	Battery	Lithium Battery	
12	Battery Capacity	13.2Ah	
13	Cycle Life	≥500 times charge and discharge	
14	Charging Time	≤6h	
15	Dimension	500mm x 270mm x 170mm	
16	Weight	8Kg	

SZSW2631 Portable Work Light

■ Characteristics



Warning Light



Yellow Light

(Always on, strobe, burst flash)



Red Light

(Always on, strobe, burst flash)



After the lifting rod is raised, it can be carried by hand



Red and yellow (optional) warning lights are set on the back of the illuminating lamp head. Effectively warn vehicles coming and going, and protect the safety of on-site operators. All, to meet the lighting needs of different places.




Automatic clamping device Lifting rod automatically locks after putting in

Method of operation:

Press the warning light switch to turn on the warning light in any state, then press the warning light in turn. The switch can realize the functions of constant light, strobe and flash.

■ Dimension (Unit:mm)

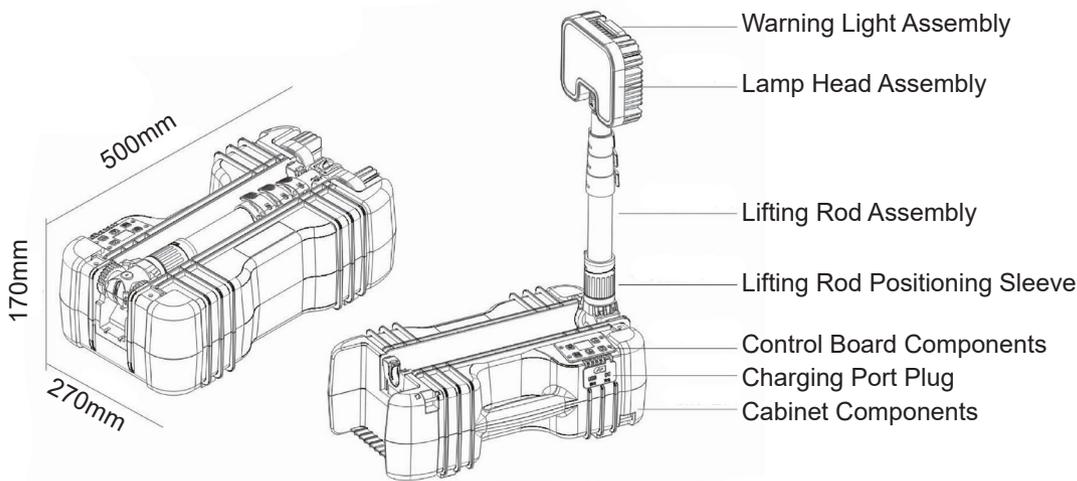

■ Lifting Height

