

SZSW8155 Explosion-proof LED Light Fixture




Technical Parameters



NO	Parameter			Unit	SZSW8155 -100F	SZSW8155 -80F	SZSW8155 -100F	SZSW8155 -80Q	SZSW8155 -100Q		
1	Input Power	Voltage/Frequency		V	DC250	AC220/50Hz					
2	Function				Intelligent DC Carrier	Standard					
3	Light Source	LED	Power		w	100	80	100	80	100	
			Luminious Flux		lm	12000	9600	12000	8000	10000	
			Energy Save Mode	Power	w	10~100 (Adjustable)	/				
				Luminious Flux	lm	120~12000	/				
			Light Type		/	Floodlight				Omnidirectional Lights	
			Average Life		h	100000					
4	Ex-mark				Ex d IIC T6 Gb/Ex tD A21 IP66 T80℃						
5	Color Temperature				2700-6500K						
6	PF				0.9						
7	RA				>70						
8	Beam Angle				115°/165°						
9	Lighting Effect				120 lm/W(±10%)						
10	IP/IK Level				IP66/IK08、IK10						
11	Ambient Temperature				-20℃~45℃						
12	Enclosure Material				Die-casting Aluminum						
13	LED Source				Osram/Philips						
14	Driver				SEVA/Meanwell/Moso/SoSen						
15	Dimension				φ260*158mm (F)		φ260*262mm(Q)				
16	Weight				5.3kg(F)		6.5kg(Q)				


SZSW8155 Explosion-proof LED Light Fixture

Dimension (Unit:mm)

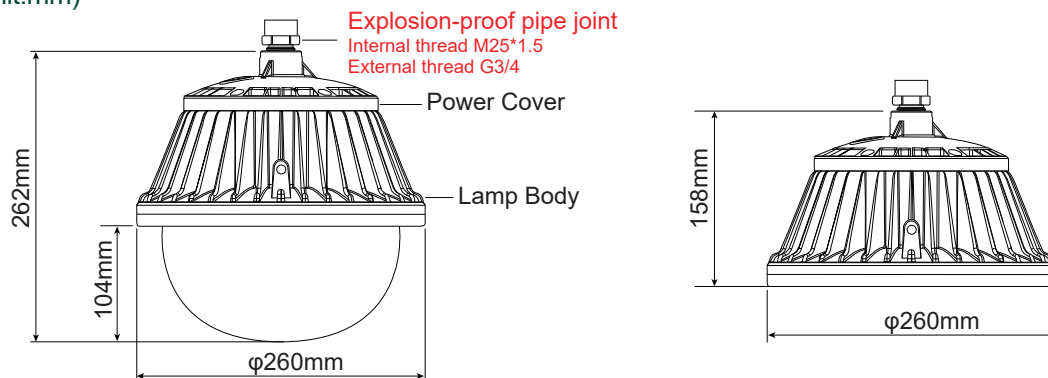


Installation Method (Unit:mm)


① Pipe Installation: ceiling, guardrail, side wall, hanging




Ceiling Type



Guardrail Type

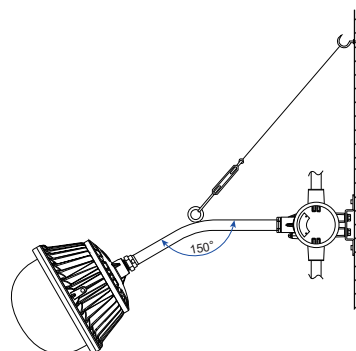


Wall Type

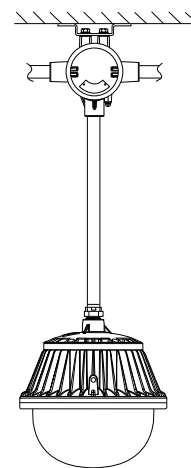


Pendant Type


② Bracket Installation: ceiling type, wall type, seat type

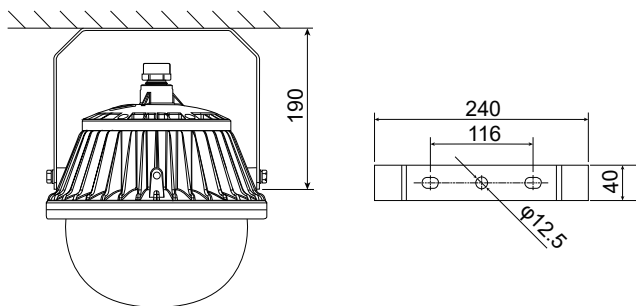

Ceiling Type



Wall Type



Seat Type

Photometric Data

