

■ Application

Miniature warning lamps for fire search and rescue, troubleshooting, and epaulet instructions.

■ Technical Parameters

With Light Source: LED (Two red two blue)

Battery Type: lithium battery

battery Voltage: DC3.7V

Battery Capacity: 120mAh

Cycle life: more than 1000 times of charge and discharge

Protection Class: IP66

Light Source Life: $\geq 100000h$

Working Time: $\geq 8h$

Charging Voltage: AC100~240V, 50-60Hz



Charging Method: Micro-USB, 5V1A / 5V2A charger

Charging time: 1h


Ambient Temperature: $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$

Weight: 12g

■ Dimensions (Unit:mm)



■ Characteristics

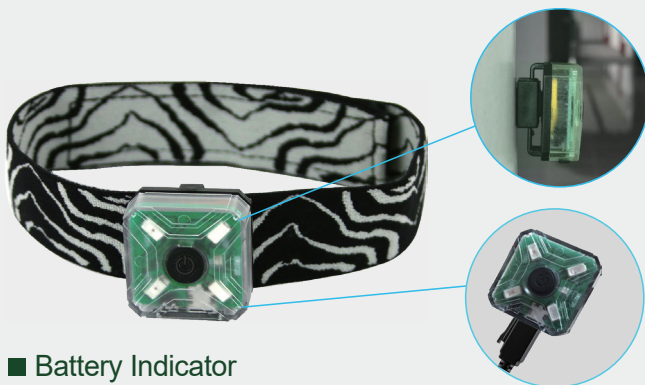

■ Battery Indicator



Red light: $0 < \text{power} \leq 30\%$



Yellow light: $30\% < \text{power} \leq 70\%$



Green light: $70\% < \text{power} \leq 100\%$


■ Magnetic Attraction

The lamp is equipped with two magnetic and adhesive adapters.

■ Dual Dode Switching Design

Built-in rechargeable lithium battery, which can be charged by mobile phone charger, convenient and practical.

■ Red and blue dual light sources



Using 4 high-performance LEDs, red and blue light flashing alternately, covering many places of use.