

# SW2910 All-around Auto Pulley Working Light

## ■ Features

- It is suitable for large-scale lighting on the scene of various large-scale rescue, emergency repair and construction.

## ● Passed The National Fire Inspection

Type A	4x500W Halogen Lamp Holder
Type B	2x400W Metal Halide Base
Type C	4x80W LED Lamp Holder



Type A: Halogen Lamp



Type B: Metal Halide Lamp




## ■ Technical Parameters

No	Table Of Basic Product Parameters			
1	Product Model	Halogen Lamp	Metal Halide Lamp	LED Lamp
2	Light Source	Halogen Lamp	Metal Halide Lamp	LED
3	Lamp Power	4x500W	2x400W	4x80W
4	Rated Voltage	220V , 50Hz	220V , 50Hz	220V , 50Hz
5	Luminous Flux	4x9500lm	2x36000lm	4x9600lm
6	Average Lamp Life	20000h	20000h	100000h
7	Maximum Lifting Height	4.5m (Standard) 5m / 6m (Optional)	4.5m (Standard) 5m / 6m (Optional)	4.5m (Standard) 5m / 6m (Optional)
8	Lifting Time	30s	30s	30s
9	Protection Level	IP65 (Lamp Base Part)	IP65 (Lamp Base Part)	IP65 (Lamp Base Part)
10	Generator	Honda EC2500CX (2KW) Honda EG6500CX (5KW)	Honda EC2500CX (2KW) Honda EG6500CX (5KW)	Honda EC2500CX (2KW) Honda EG6500CX (5KW)
11	Maximum Fuel Supply	15L (2kW) / 24L (5KW)	15L(2KW)/24L(5KW)	15L(2KW)/24L(5KW)
12	Continuous Working Time	13h(2KW) 9h (At 5KW Full Load Output)	13h (2KW) 9h (at 5KW full load output)	22h (2KW) 9h (at 5KW full load output)
13	Dimension	1010x510x800mm(2KW) 1090x560x940mm(5KW)	1010x510x800mm(2KW) 1090x560x940mm(5KW)	1010x510x800mm(2KW) 1090x560x940mm(5KW)
14	Weight	60Kg(2KW)/95KG(5KW)	75Kg(2KW)/110KG(5KW)	75Kg(2KW)/110Kg(5KW)

# SW2910 All-around Auto Pulley Working Light

## ■ Dimension (Unit:mm)

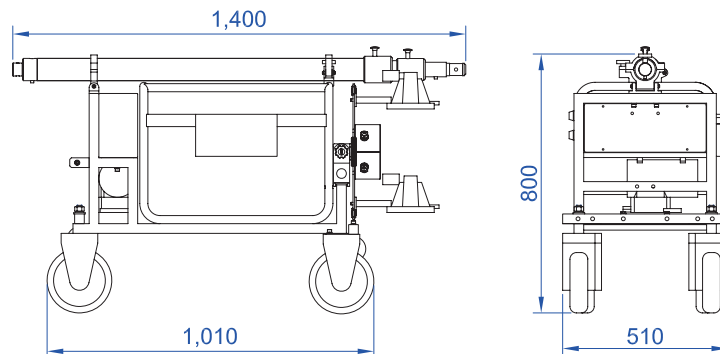

### Remarks:

1. The standard generator is Honda gasoline generator, 2KW is EC2500CX (luxury type), 5KW is EG6500CX (luxury type), manual start mode, single phase, 220V output. The electric start belongs to the additional power, and only 5KW, there is an additional cost.
2. Customers who need diesel generators are recommended to use Cape diesel generators (under Honda 24KW, without diesel generators), 2KW for KDE2200X, 5KW for KDE6500X, manual start mode, single phase, 220V output. The electric start is an additional function, which requires additional costs.
3. If you need three-phase 380V output, it is recommended to choose Honda 5KW gasoline generator ELT6500CX, 2KW generator without 380V output.

## ■ Characteristics



### New LED Flood Light Base

Newly launched 4x80W LED flood light head (C type) series, the lighting range is wider than the traditional 4x500W halogen lamp head, the lighting effect in the lighting area is greatly improved, and the LED lamps are extremely fuel efficient, 2KW generator is filled with fuel. Working time up to 22 hours.



### Built-in Electrical Circuits

The frame is equipped with a dedicated electrical box. All circuit traces are concentrated inside the electrical box to avoid the exposure of conductive parts.



### Two-way Locking Casters

Equipped with off-road casters, which can adapt to various harsh field construction occasions; at the same time, the casters have a two-way braking function, which avoids the same type of products that can only be braked in one direction, and the hidden danger of side slip is generated (two-way braking: rolling + turning; single Brake: Rolling brake).



### Opening And Closing Of Wireless Remote Control Lights (A type, C type Applicable)

The lamp head is equipped with a wireless remote control receiving device. Through the wireless remote control, each lamp is turned on and off within a range of 30 meters.

- The lamp head on the lamp panel can be adjusted at any angle of 360 degrees horizontally and 180 degrees up and down to meet the requirements of different irradiation angles and orientations, and the light coverage radius is up to 50 meters.
- With a power transmission socket, you can supply power to other equipment after taking power from the socket.
- That is, it can be powered by a generator, and it can also be directly powered by the mains in places with mains.
- The overall use of various high-quality metal materials, compact structure, stable performance, to ensure normal operation in various harsh environments and climate conditions, rain, water spray, wind resistance level is 8.